


# VERITAS

Standing Desk

ITEM NO. Z6DKDZ0520

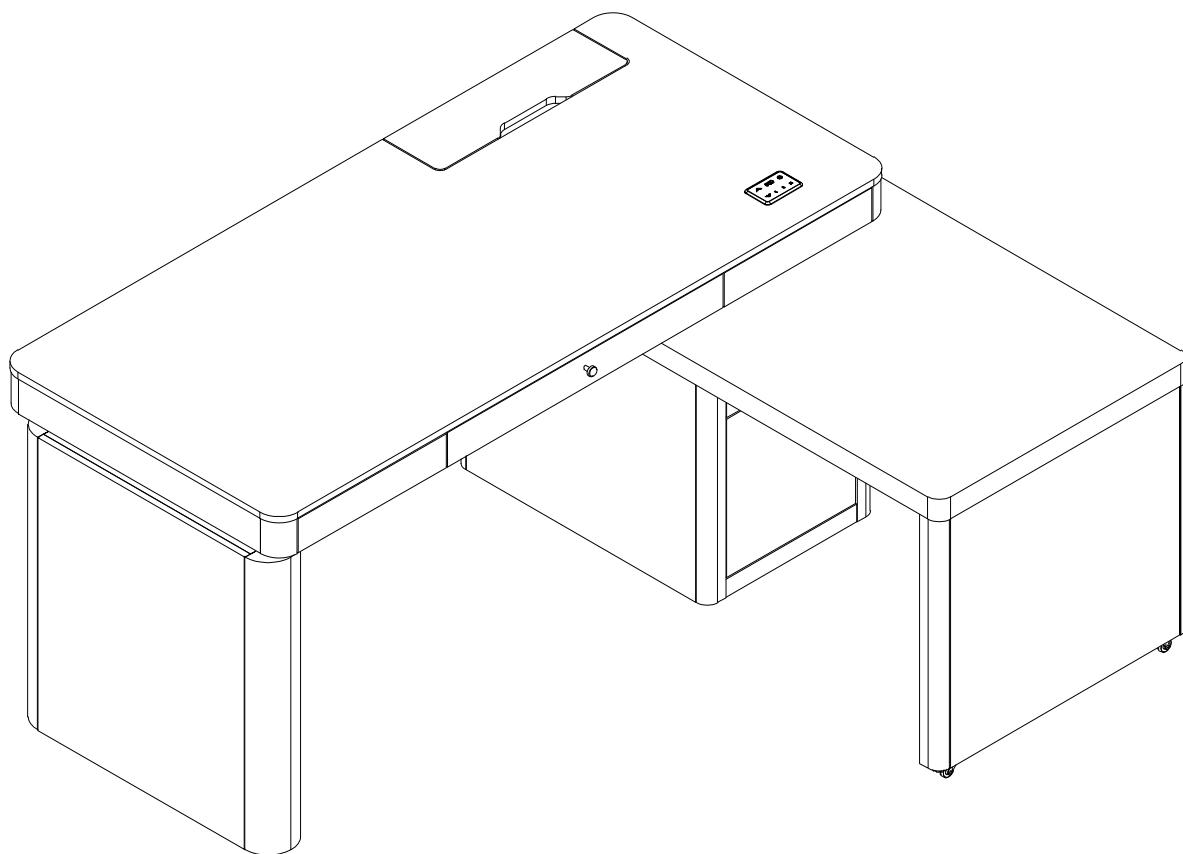

HULALA®  
HOME

(i)

ASSEMBLY  
INSTRUCTIONS

# MAINTAINANCE AND WARNINGS

***Thank you for purchasing the Standing Desk.***

***Please read the instructions and warnings carefully before use, to ensure safe and satisfactory operation of this product.***



## Before You Start

***Please follow the steps below:***

- ⚠️ Unbox the package and check if all parts and accessories are complete.
- ⚠️ If you find something missing, stop installing and contact your supplier immediately.
- ⚠️ Please do not completely tighten all the hardware until the entire assembly is completed! Be sure to tighten all the hardware once the assembly completed.
- ⚠️ NOTE: Should be assembled on soft surface to keep balance.

## After-Sales Service

- If you encounter any issues or need technical support during use, please contact our after-sales team. We offer long-term maintenance and warranty services.



## Warranty

- ⚠ We strive to offer high , quality products, and we also try our best to satisfy each and every customer that orders from us with product or service as needed. We provide 30 days warranty starting from the time you receive the item. Each customer must provide a record of their order such as the order number, or item receipt for any items that are out of the warranty period you may also still receive replacement parts by purchasing them with our company if they are available.
- ⚠ Are you having difficulty with assembly? Missing parts? Please send email with your order No to **[customerservice@hulalahome.com](mailto:customerservice@hulalahome.com)**
- ⚠ For return, please check the return policy with the retailer or market place you bought from. Appreciate your purchasing from us. Pop up your life by our furniture piece!

### Daily Maintenance

- Keep furniture away from heat.
- Do not clean furniture with harsh cleansers or polish. Do not use detergents, Solvents, abrasives. spray packs or leather cleaner. Use non-color mild soap with warm water clean spills(Mix 1:10 soap to water)
- Do not place furniture under direct sunlight, material will possibly fade over time.
- Do not use on site dry Cleaning machine.
- Children should not climb or jump on the furniture.
- Do not write on furniture without a padded barrier to protect the surface.
- Not for commercial use, For residential use only.

# Exploded Diagram





ITEM NO.Z6DKDZ0520




Scan to get the  
installation video

Please confirm that you have  
received all 3 boxs(box A/B/C),  
then begin the assembly!

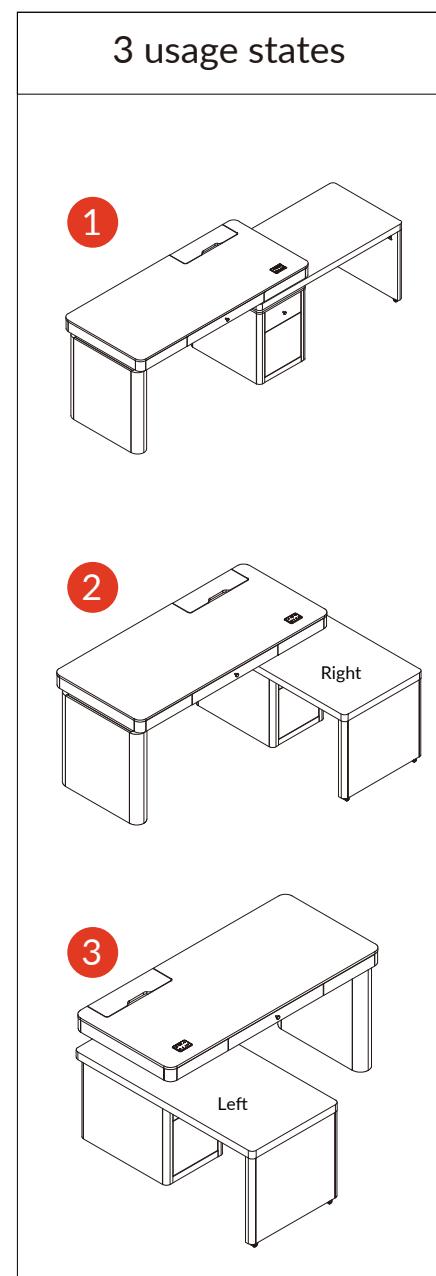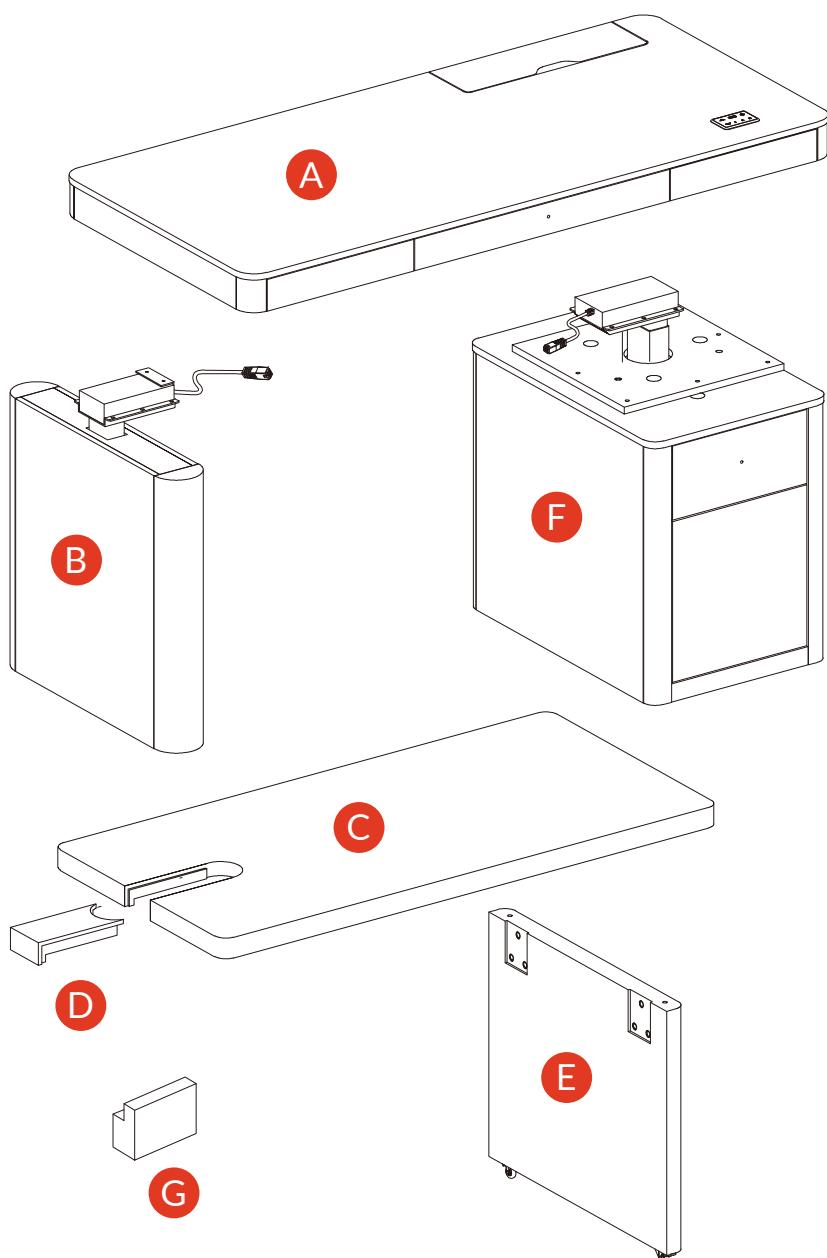


Installation:  
30 minutes.



Requires 2 People  
for Assembly


## Parts List (Carton A)

**A** ×1




Desk Panel

**C** ×1



Secondary Desktop

**D** ×1



Small Middle Panel

**G** ×1



Clamp Block  
(Prepare for the installation  
of the monitoring bracket)

## Hardware List (in Carton A)

**1** ×12




Bolt M6\*12

**2** ×1



Allen Key 4mm

**3** ×1




Control Box

**4** ×2




Wood Dowel  
Ø10x40mm

**5** ×12




Bolt M8\*20

**6** ×1




Allen Key 5mm

**7** ×1




Power Adapter

**8** ×1



Horizontal Auxiliary  
Support

**9** ×5




Bolt M6\*25

**10** ×5



Flat Washer Ø 13mm

**11** ×3




Bolt For Handle  
M4\*24

**12** ×3




Handle

**13** ×2




L Connect Bracket

**14** ×4



Flat head screw  
Ø4X20


**15** ×1



Screwdriver


## Parts List (Carton B)

**B** ×1



Foot Box


**E** ×1



Side Leg

## Parts List (Carton C)


**F** ×1



Cabinet Body


## Spare List (in Carton A)

**1** ×1




Bolt M6\*12

**5** ×1




Bolt M8\*20

**9** ×1



Bolt M6\*25

**10** ×1




Flat Washer Ø 13mm

# ASSEMBLY INSTRUCTIONS

## Step 1

Install the L-shaped connection bracket (13) onto the Secondary Desktop (C) using bolts (5), and fully tighten the bolts with Allen wrench (6).

5		x 6
6		x 1
13		x 2

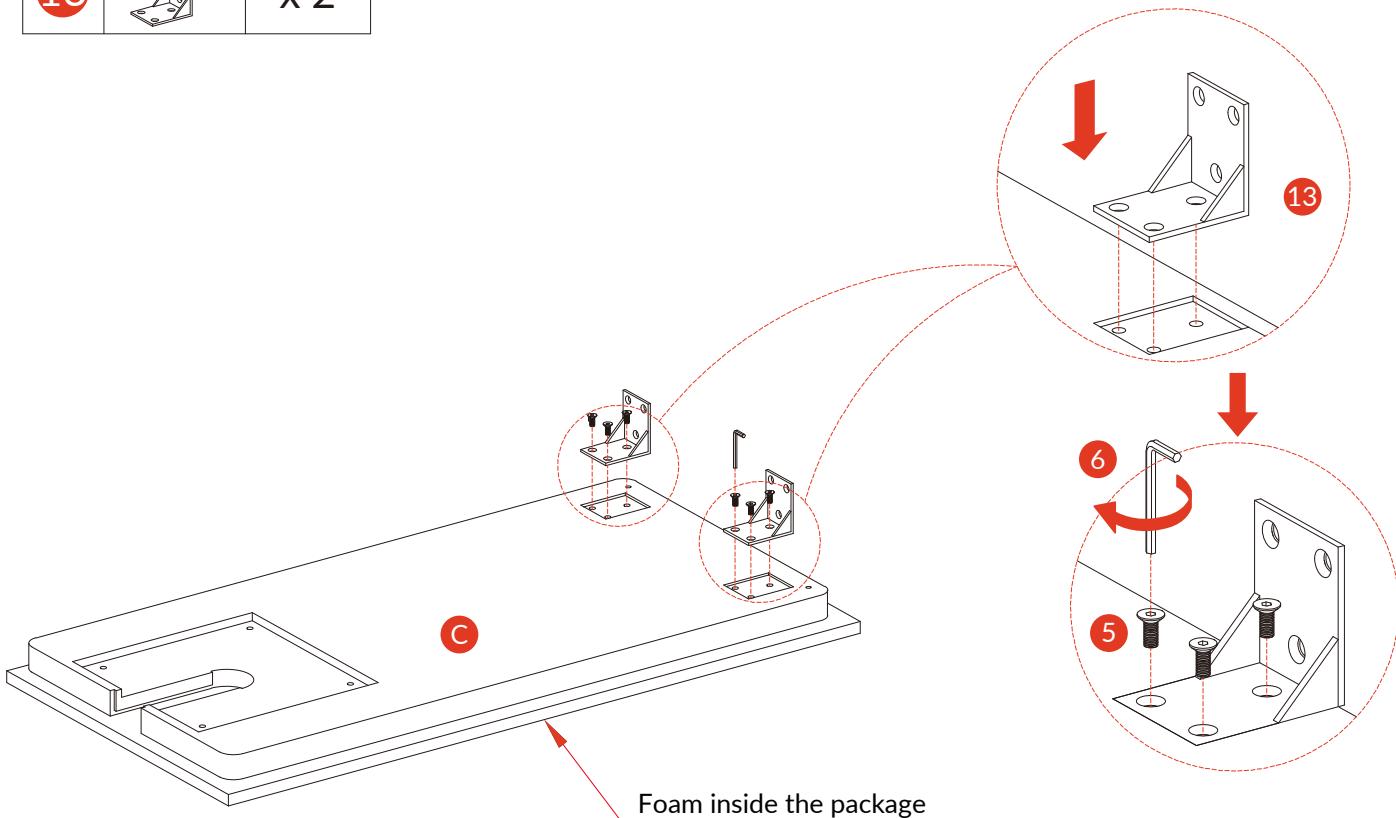


## Step 2

Insert the Wood Dowel (4) into the hole of Secondary Desktop (C) and connect it to the side panel (E) Install the L-shaped connecting bracket (13) onto side panel (E) using bolts (5), and fully tighten the bolts with Allen wrench (6).

4		x 2
5		x 6




Note:  
The operation takes two adults to complete.

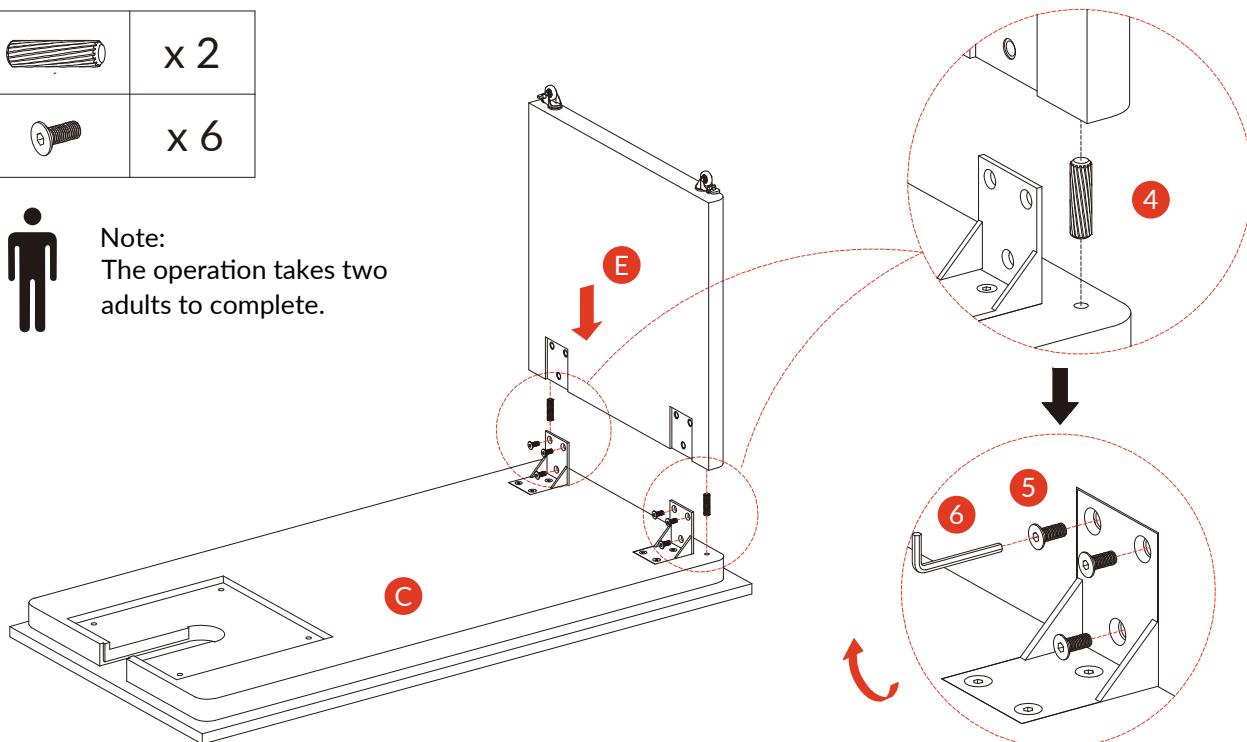

## Step 3




Note:  
Lift the plastic part inside.

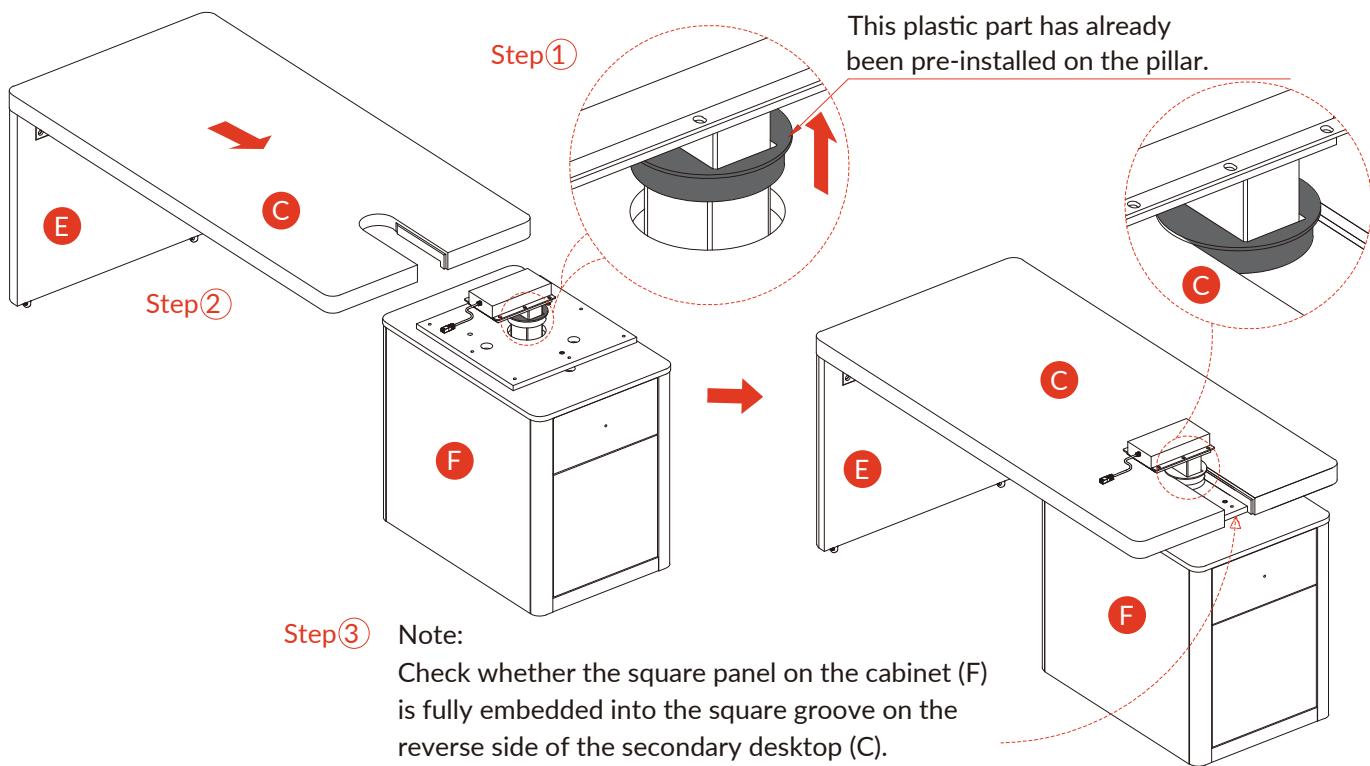

## Step 4


Rotate the Secondary Desktop (C) to the appropriate position, and use bolts (9) and flat washers (10) to install the cabinet body (F) onto Secondary Desktop (C). Place it on and fully tighten the bolt with an Allen wrench (2).

2		x 1
9		x 4
10		x 4

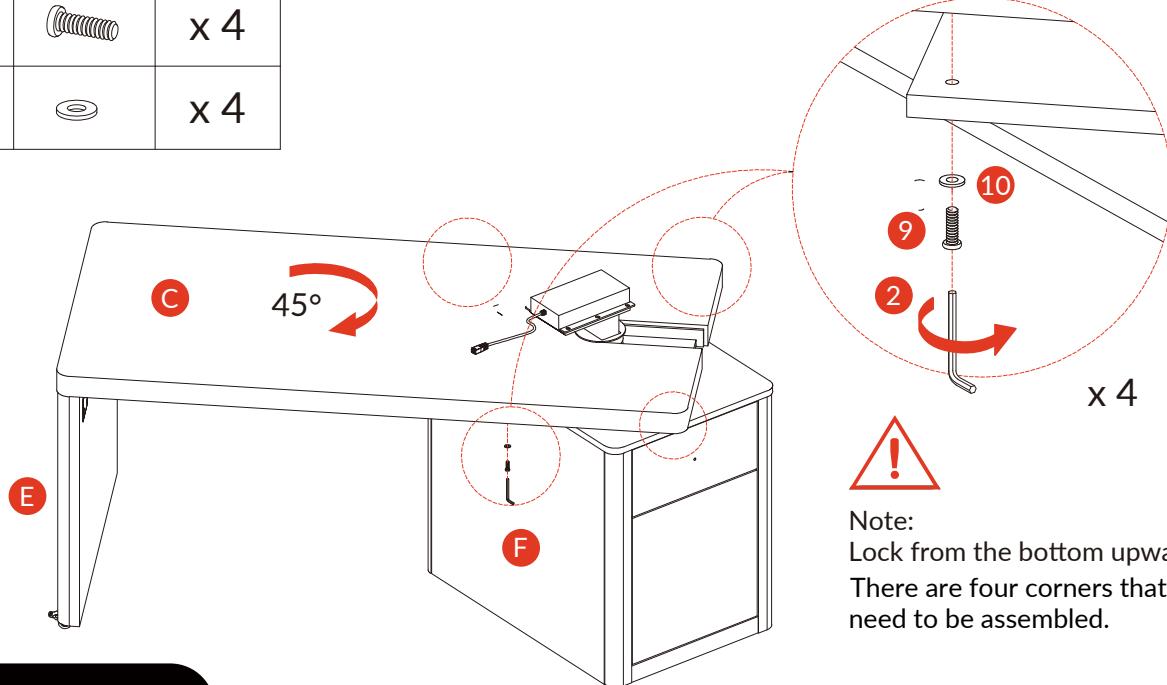


## Step 5

As shown in the figure, Insert the small middle panel (D) and keep the outer surfaces level.

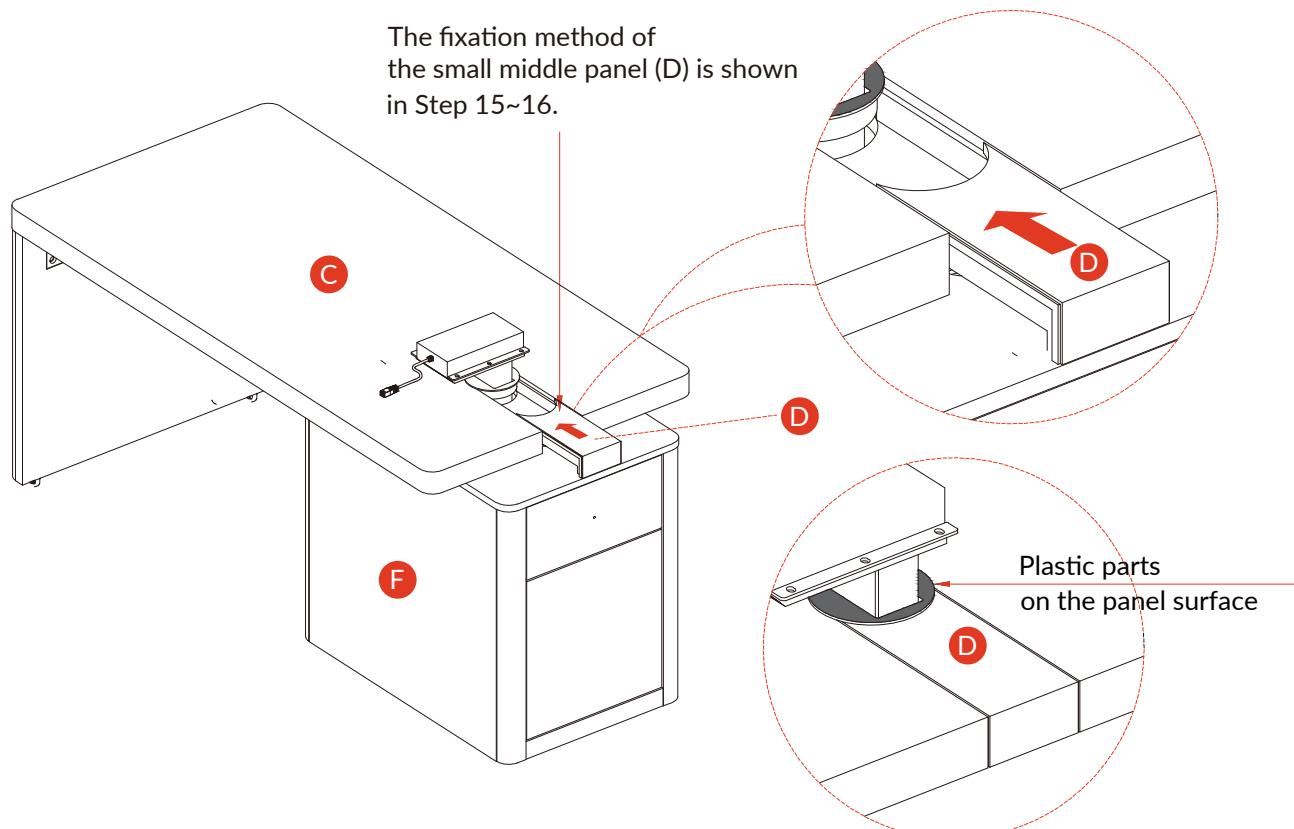


## Step 6

3		x 1
7		x 1

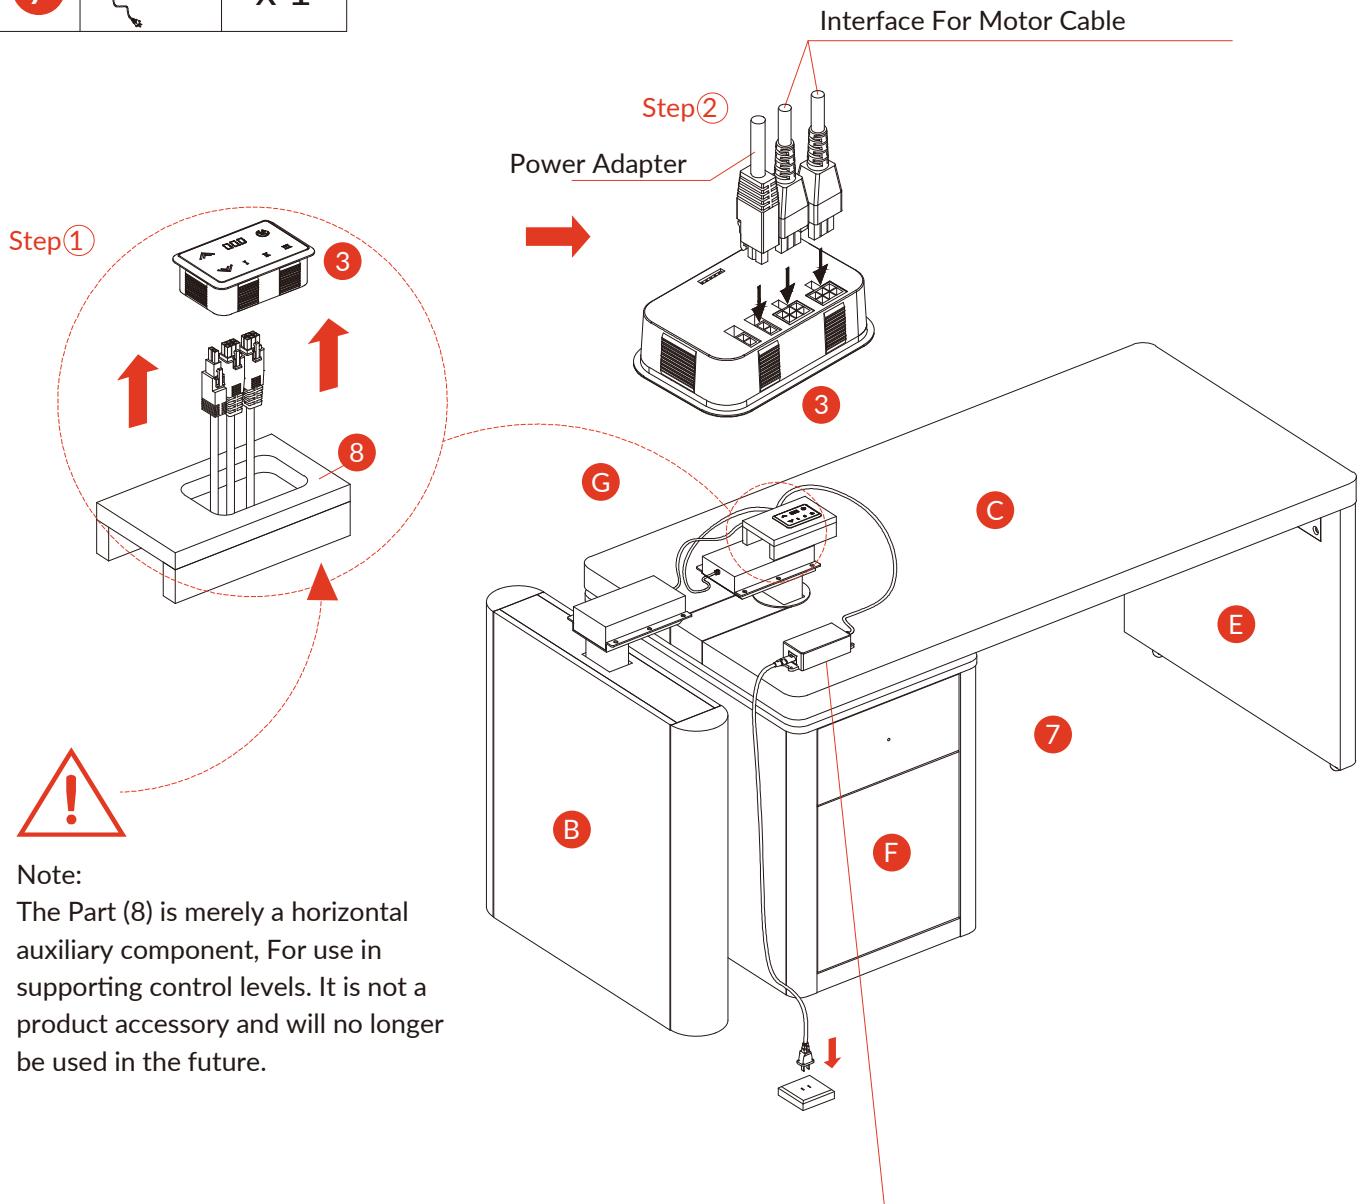


1. Connect the motor cable and adapter cable to the control as shown.
2. Plug the power adapter cord into the socket and switch on the power.
3. The manual controller needs to be operated in a smooth and horizontal state, and then touchbutton (III) to raise the desktop.

## Step 7

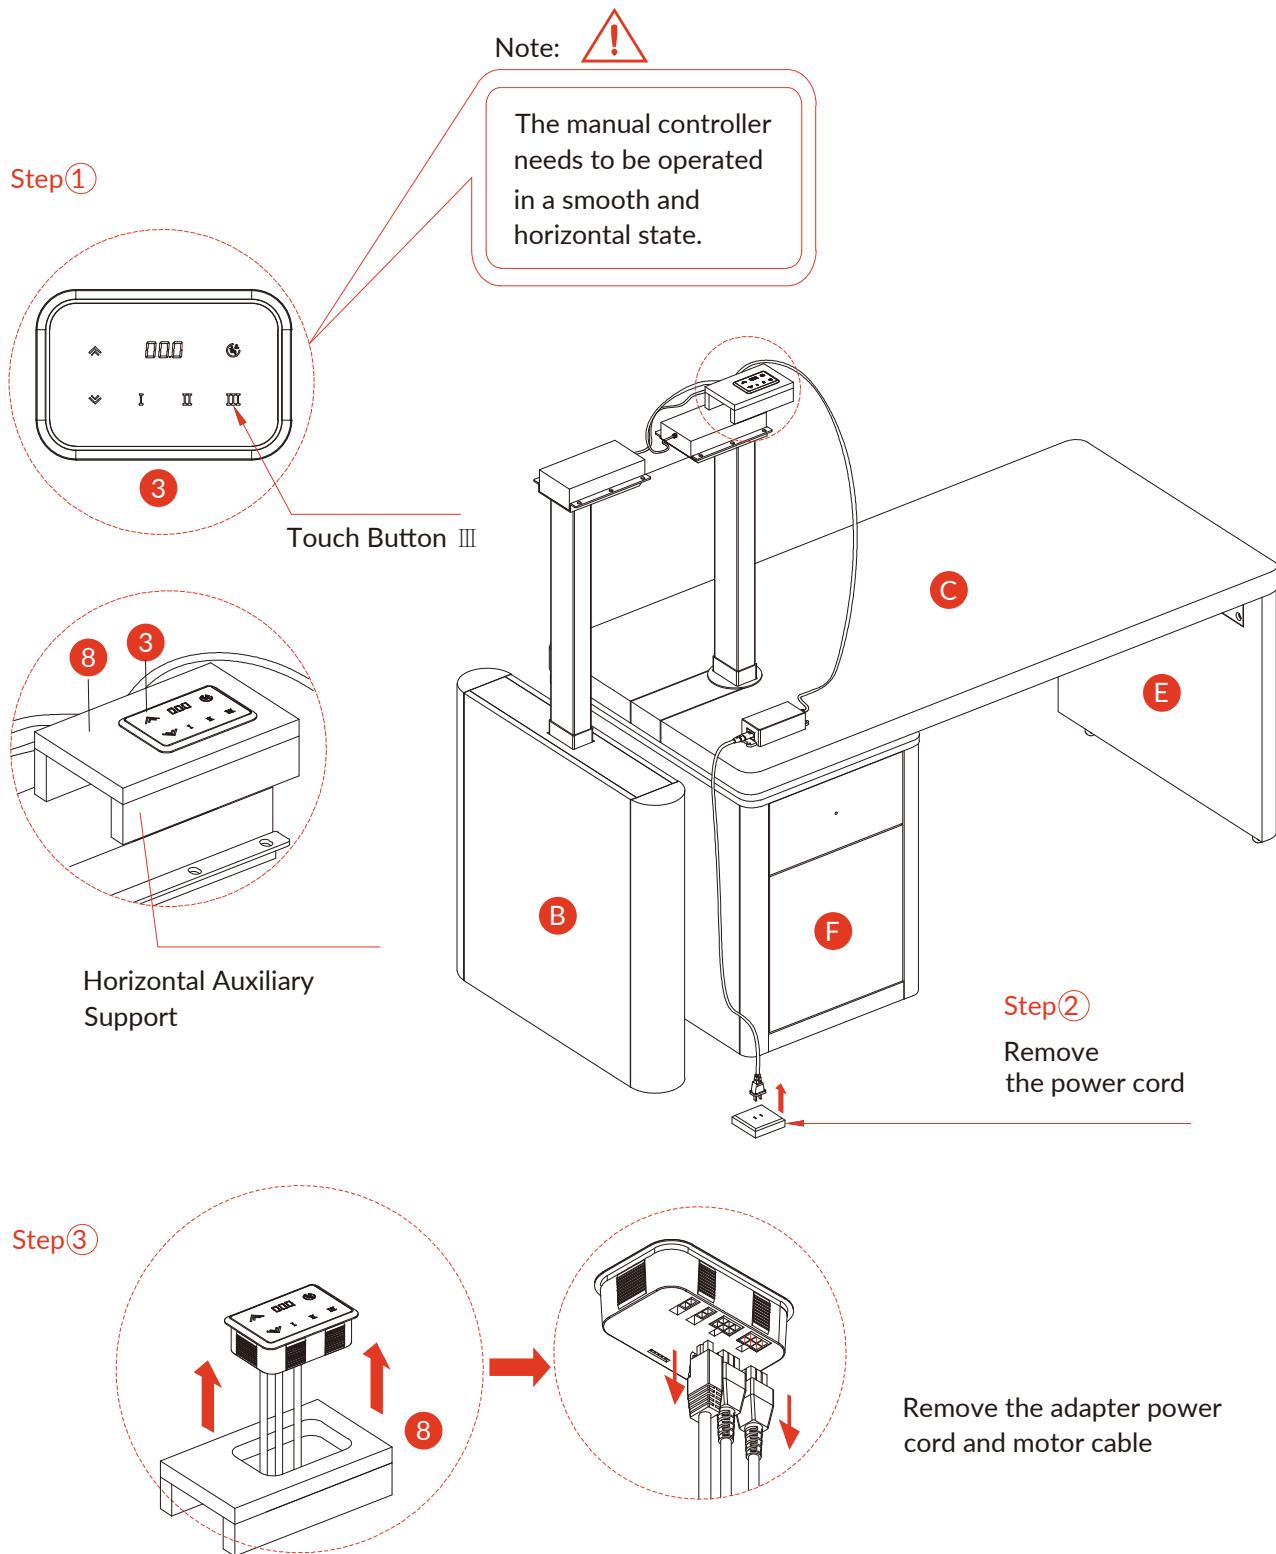

## Step 8


The required installation distance for placing on the desktop is 40.5".

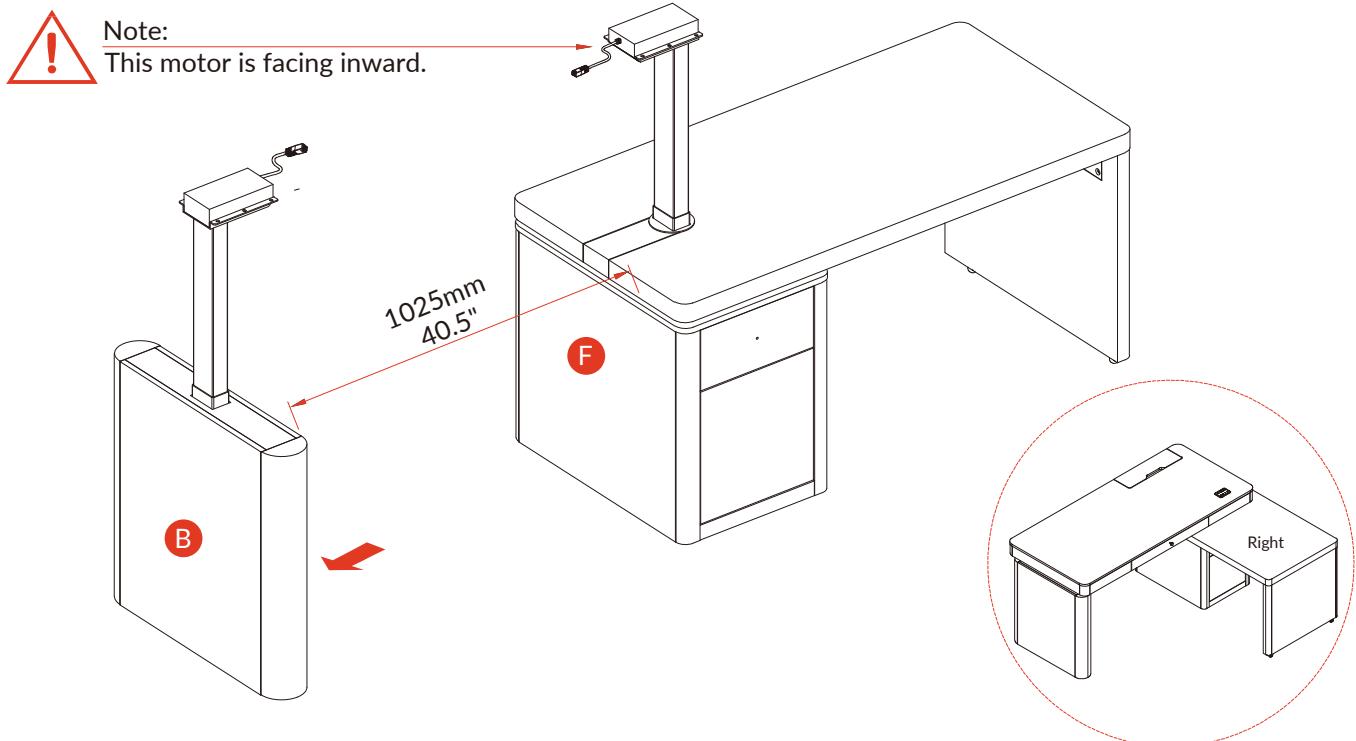

## Step 9


7		x 1
14		x 2

Note:  
Power Adapter (7)

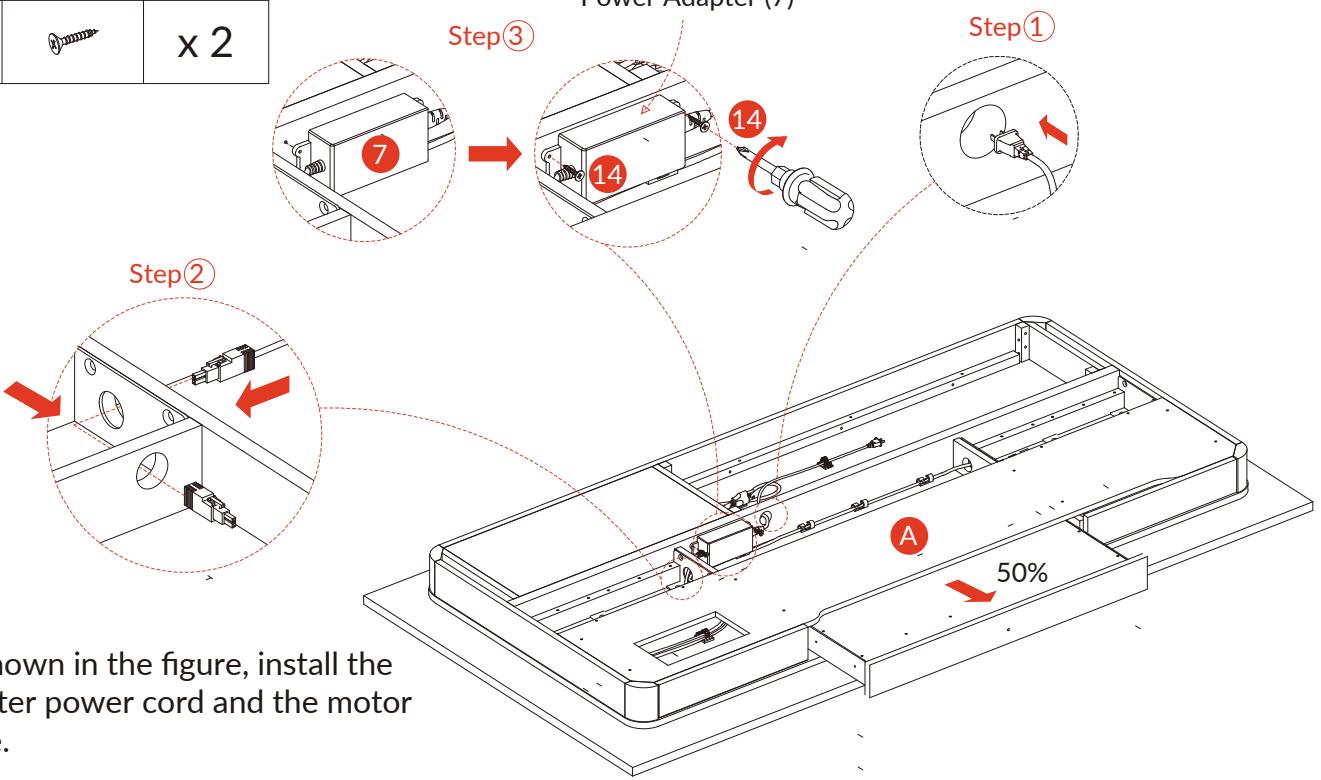

As shown in the figure, install the adapter power cord and the motor cable.




## Step 10

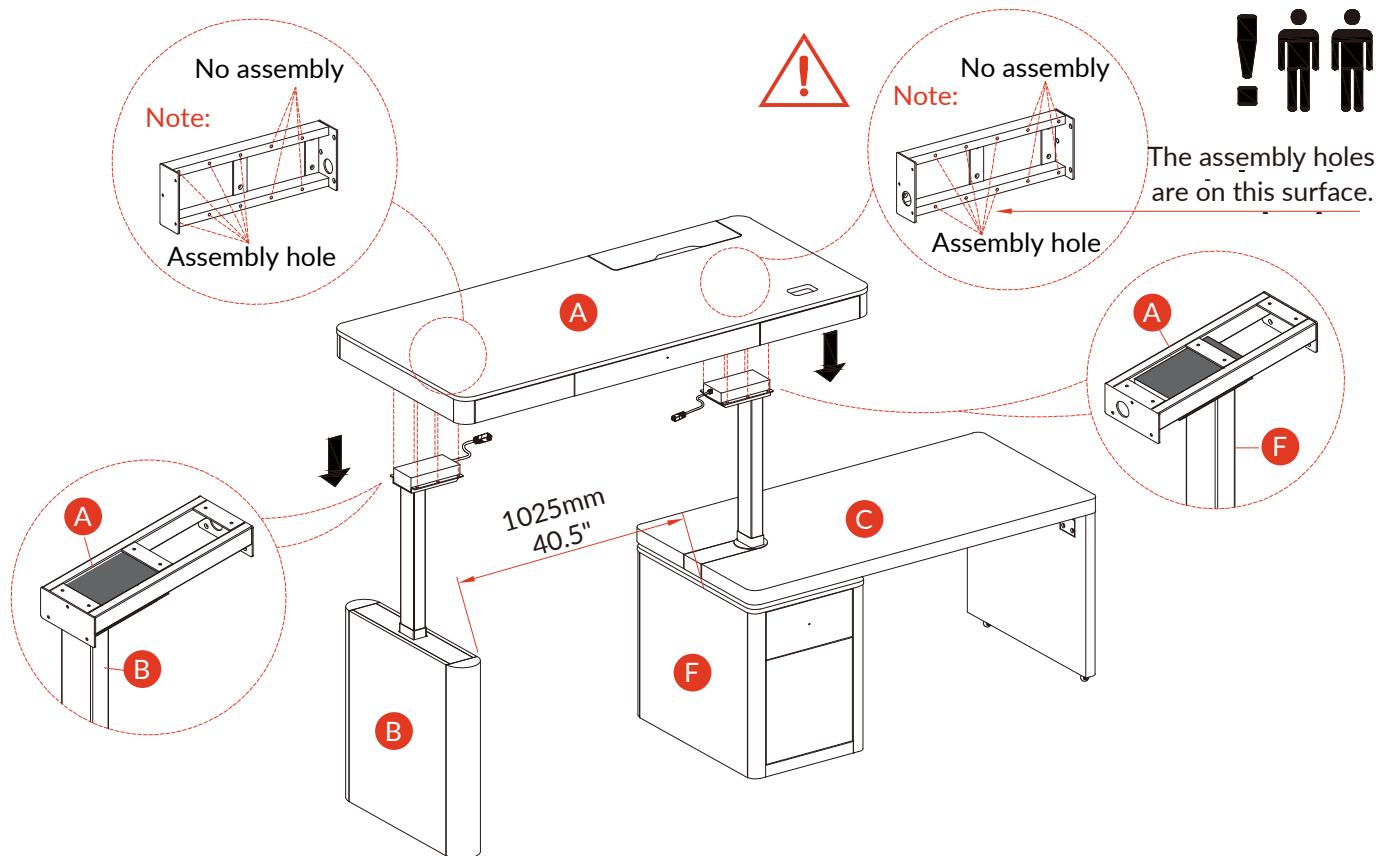

According to the assembly holes, carefully place the tabletop on the head of the lifting column. Then check the alignment of the assembly holes.


## Step 11

1		x 12
2		x 1

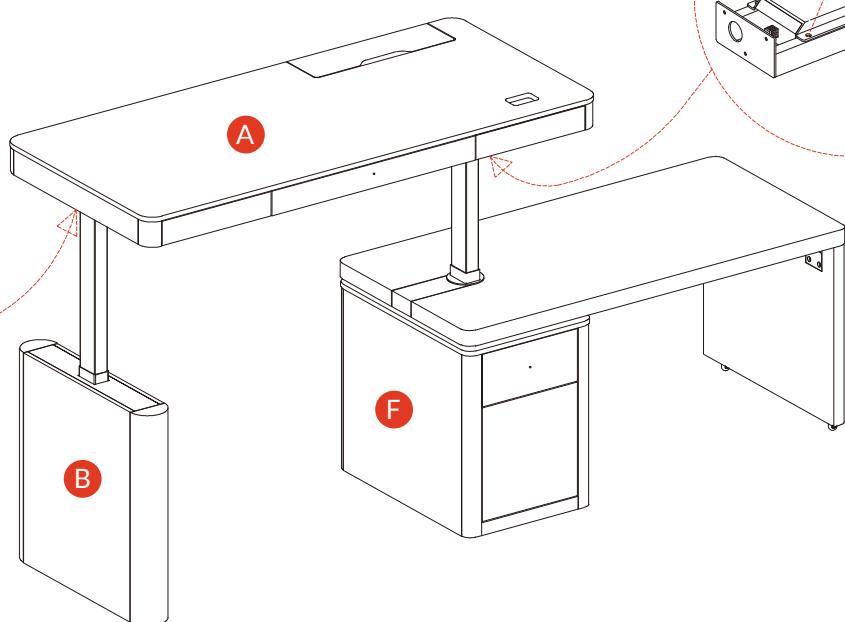

Note:  
Lock from the bottom upwards.  
Fully tighten the bolts in sequence after all bolts proper connected.

## Step 12

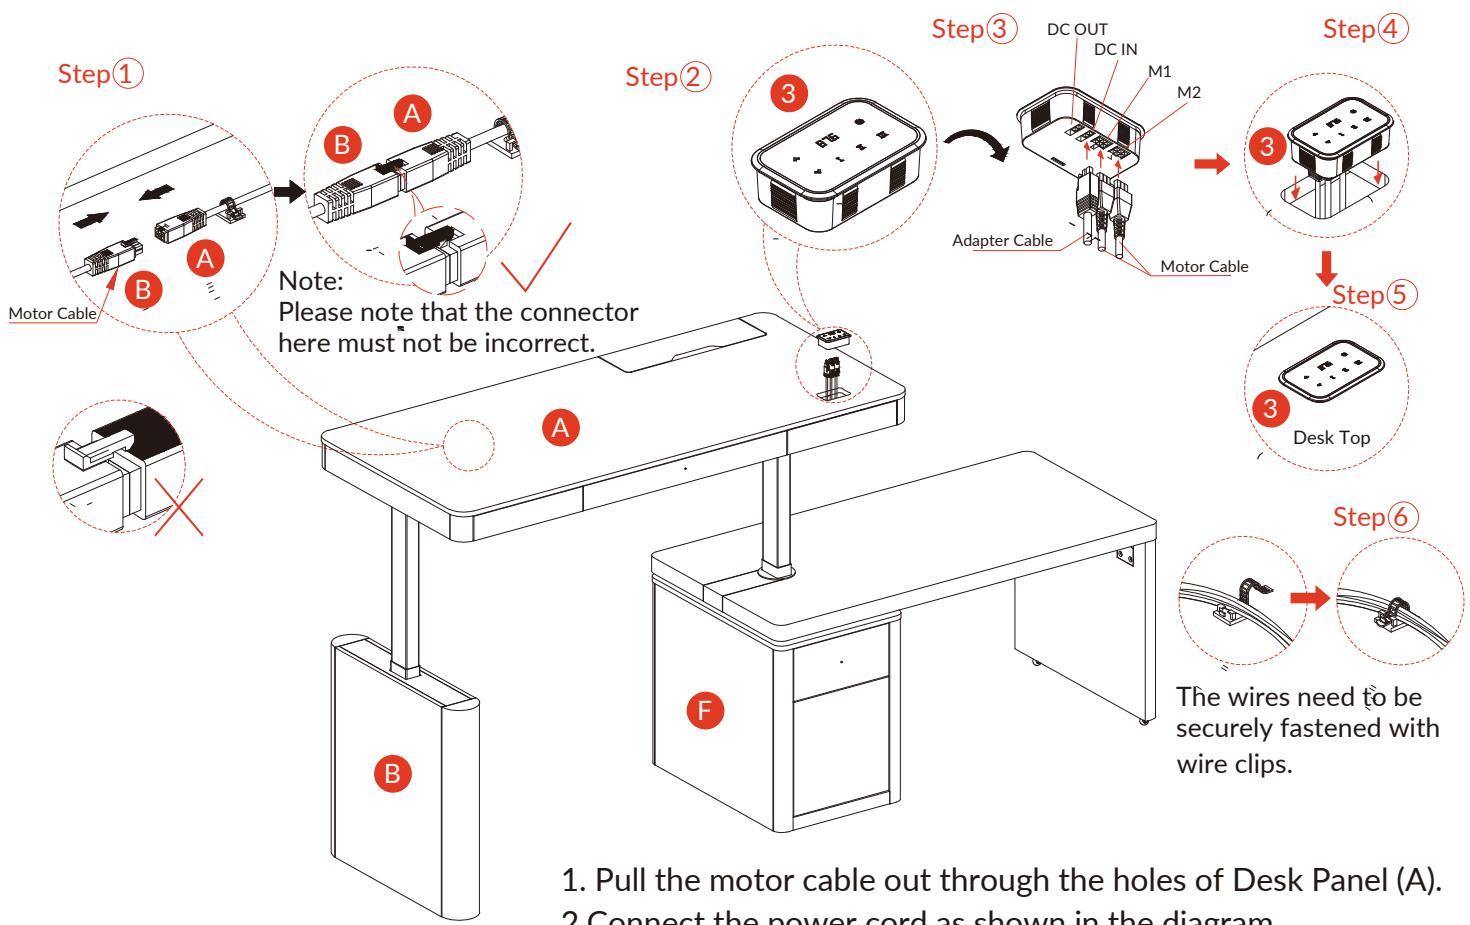


1. Pull the motor cable out through the holes of Desk Panel (A).
2. Connect the power cord as shown in the diagram.

## Step 13


As shown in the figure, complete the assembly of the handle.

11		x 3
12		x 3

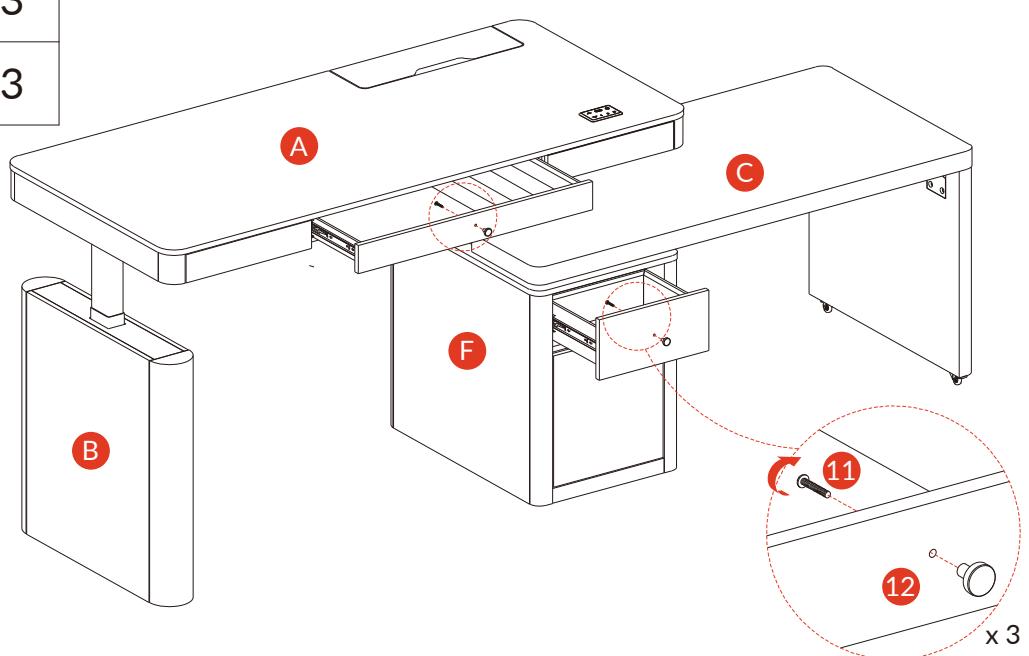


## Step 14

1. The door on the main body of the cabinet can be easily pushed open and will close when pushed again.
2. If the door does not open or close properly, you can twist it inward or outward as shown in the figure.

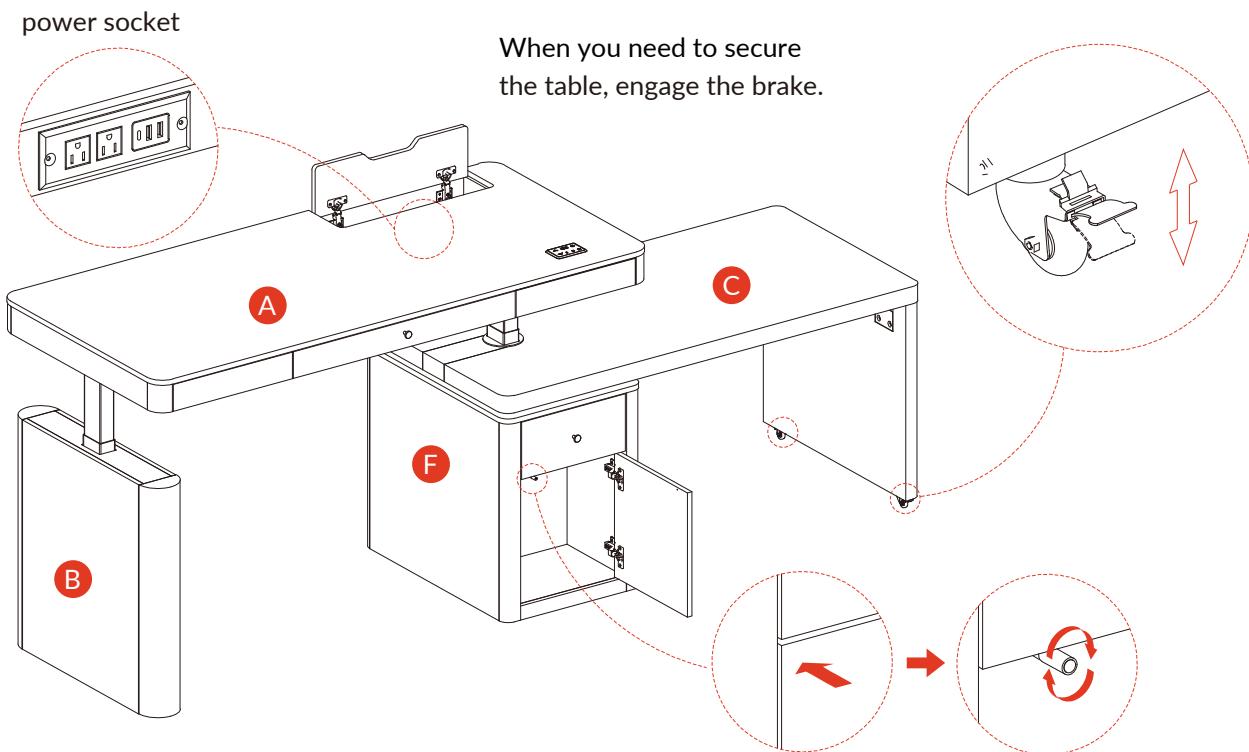

## Step 15

Remove the drawers of the cabinet (F) according to the method shown in the figure.

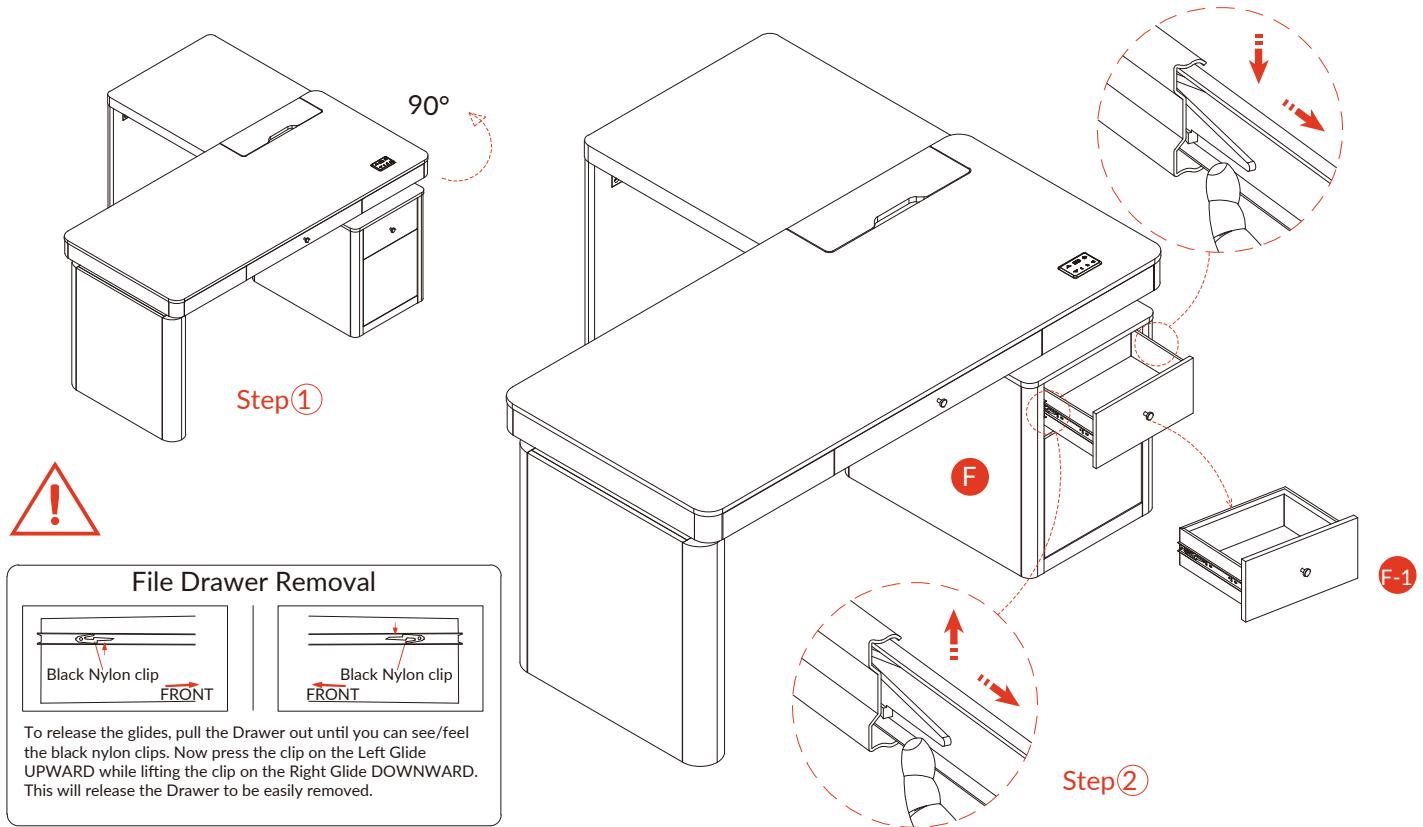


## Step 16

Rotate the Secondary Desktop (C) to the appropriate position, and use bolts (9) and flat washers (10) to install it onto the small panel in the middle through the cabinet body (F)(D) Position it and fully tighten the bolt using an Allen wrench (2).



Note:  
Fixed small middle panel (D)

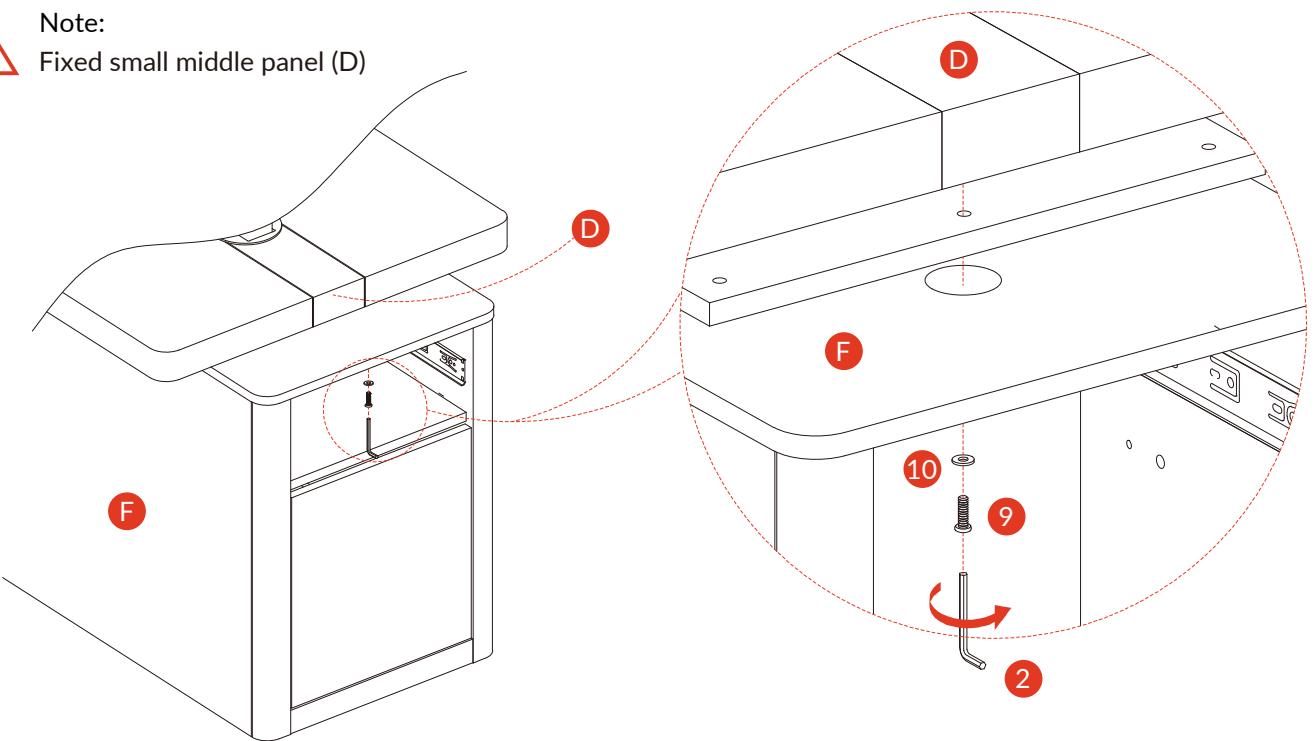


## Step 17




### File Drawer Installation


1 CORRECT



2 CORRECT




Before inserting the Drawer, make sure to slide the ball turntable plates located on the Side Frames to the FRONT of the unit as illustrated.

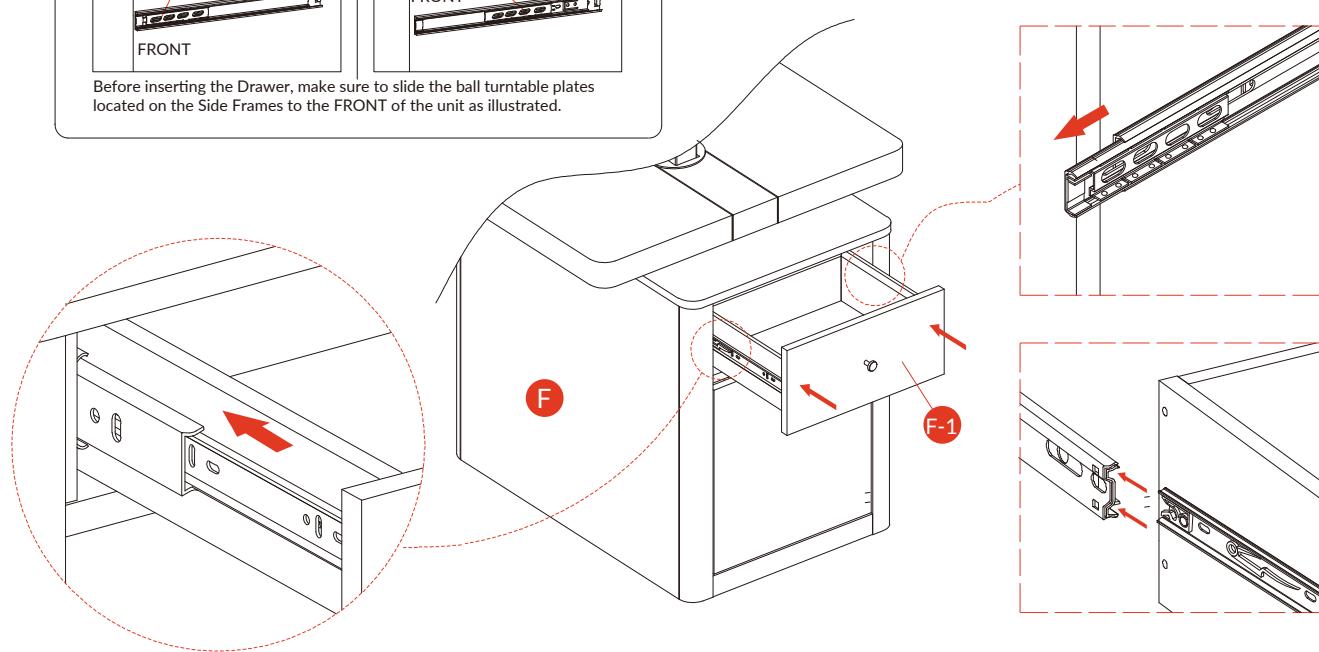

## Step 18


Component G (Clamp Block) can be used to assist in installing a monitor bracket.

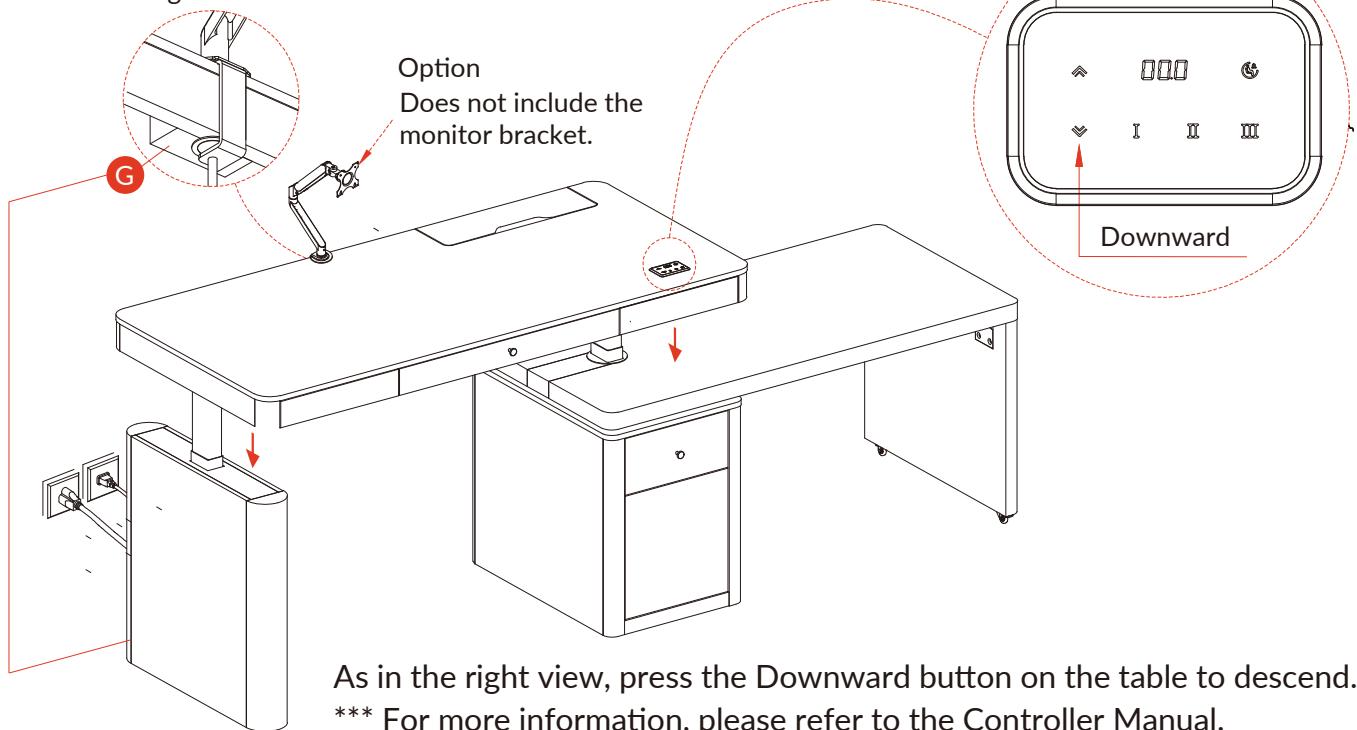

As in the right view, press the Downward button on the table to descend.

\*\*\* For more information, please refer to the Controller Manual.

## Step 19

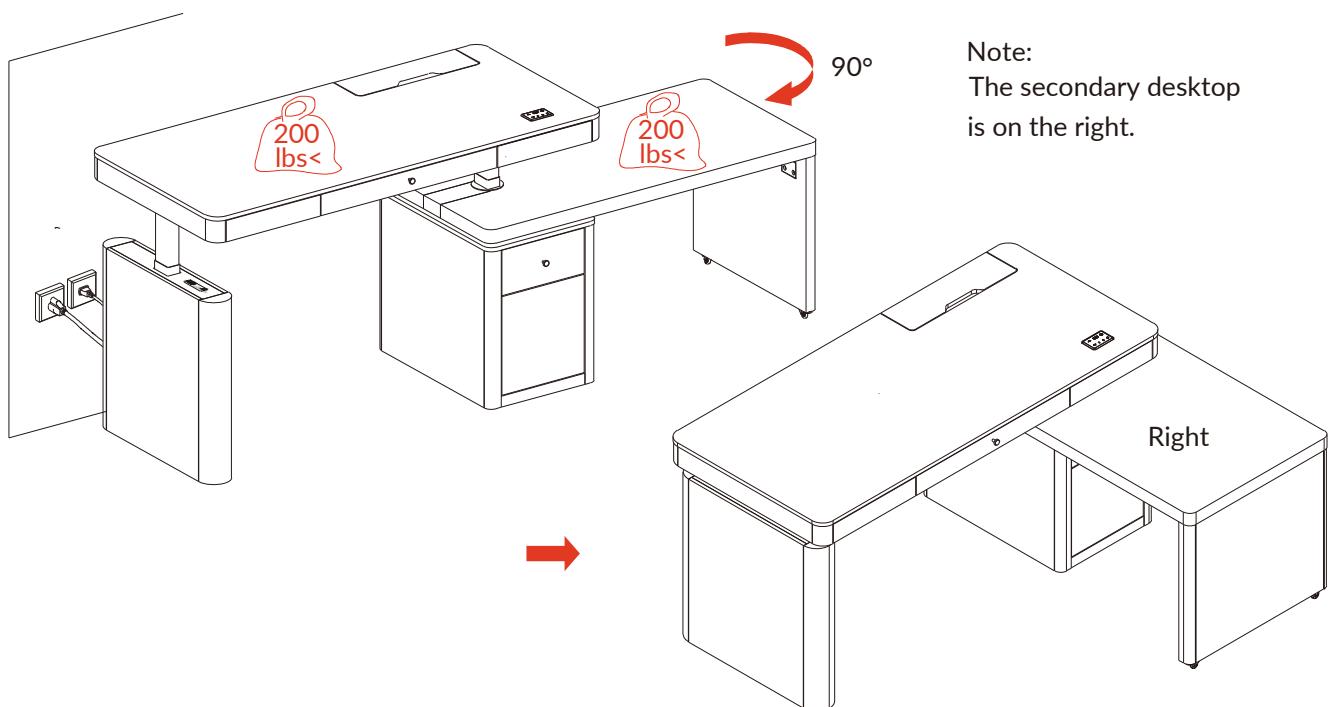

Note:  
The secondary desktop  
is on the right.


## Option

Note:

The secondary desktop is on the Left.


- 1.Unplug the wires.
- 2.Remove the tabletop.
- 3.Rotate the tabletop horizontally by 180 degrees.
- 4.Repeat the steps from 10 to 12 to complete the installation.

Please pay special attention that the power extension cord on the underside of the table needs to be reversed.

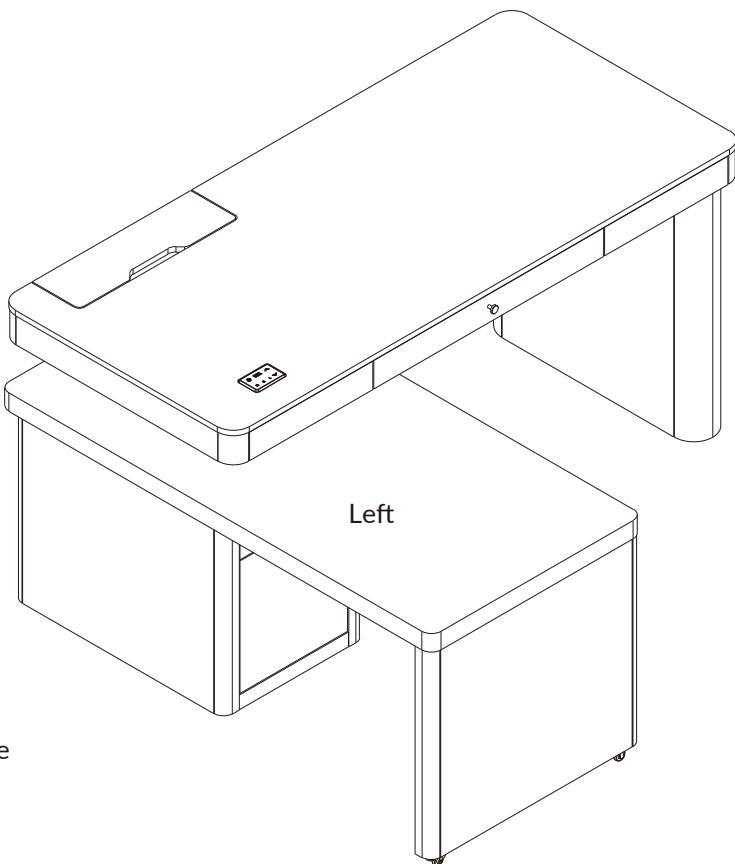

Note:

Please pay special attention that the power extension cord on the underside of the table needs to be reversed.

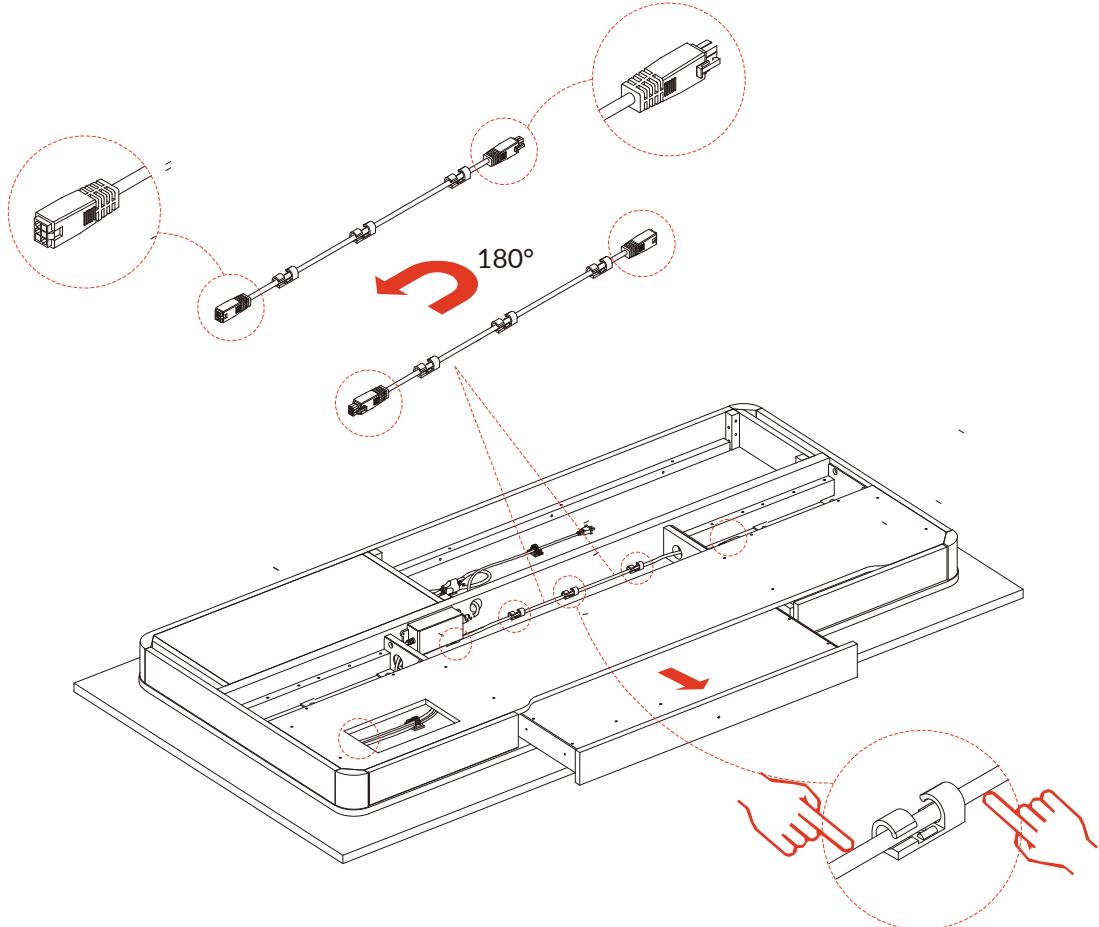



If you have any questions or concerns,  
don't hesitate to reach out to us.

[customerservice@hulalahome.com](mailto:customerservice@hulalahome.com)